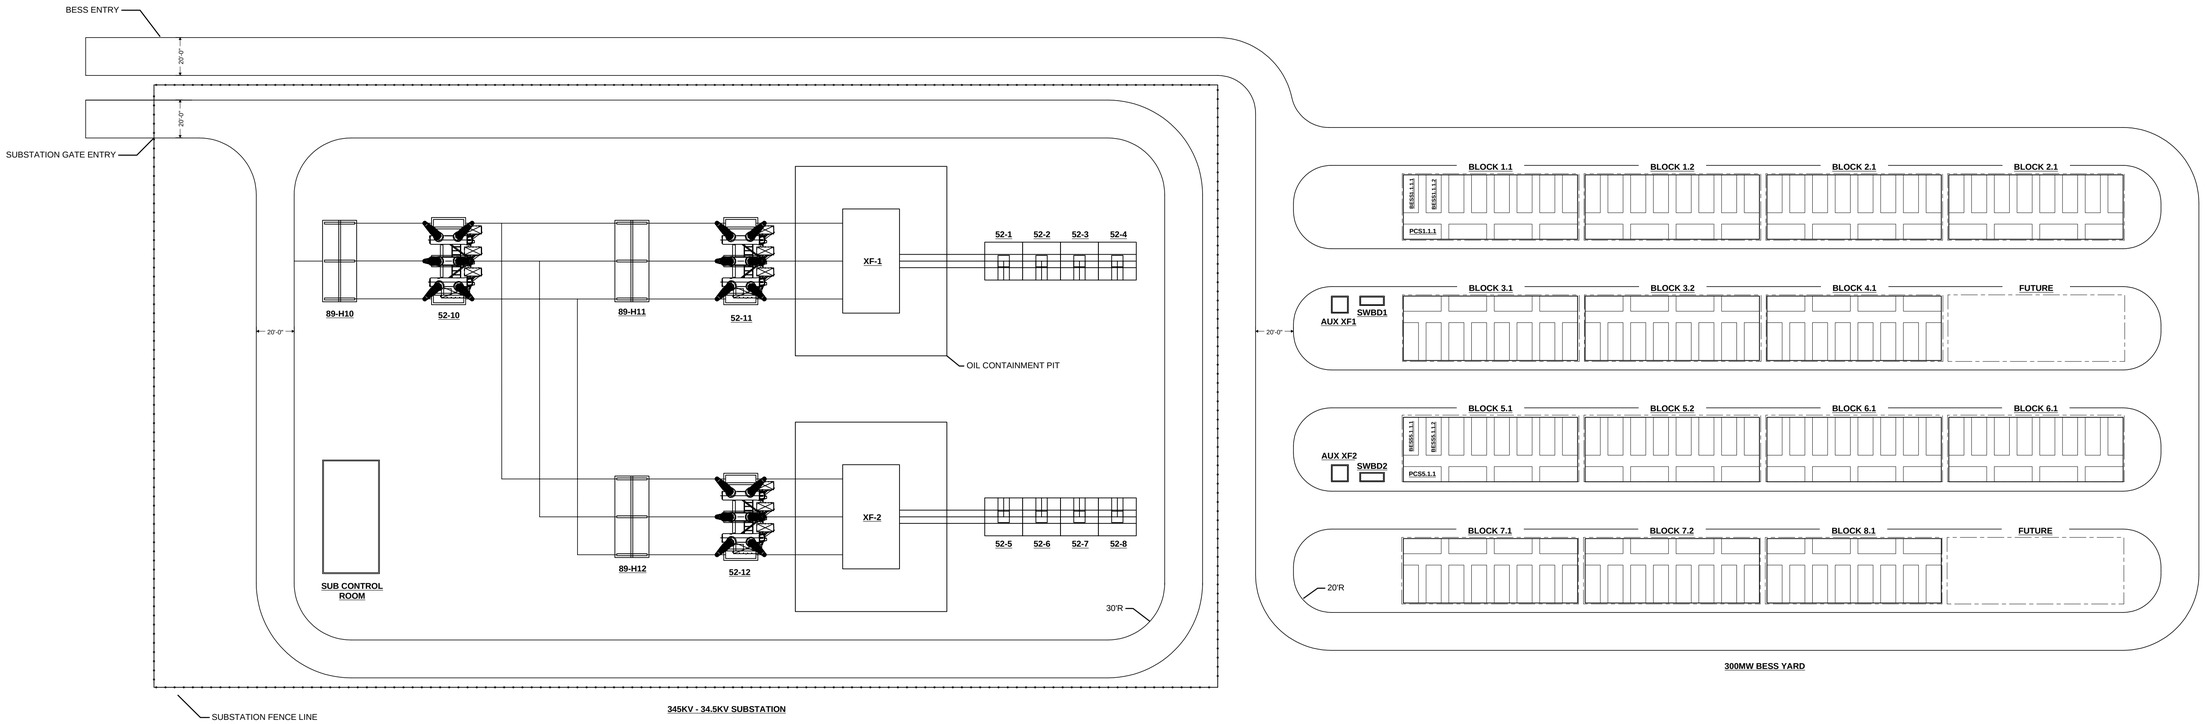

MINIMUM CLEARANCE REQUIREMENTS:

345kV MINIMUM CLEARANCE (1300kV BIL):

LIVE PARTS:
Ø-G=106"
Ø-Ø=119"

TO GRADE:
18'-0" (BUS)
30'-0" (DRIVEWAY)

34.5kV MINIMUM CLEARANCE (200kV BIL):

LIVE PARTS:
Ø-G=13"
Ø-Ø=18"

TO GRADE:
10'-0" (BUS)
22'-0" (DRIVEWAY)

NOTES:

1. DIAGRAM IS CONCEPTUAL AND FOR PRELIMINARY DESIGN ONLY.

2. FINAL EQUIPMENT RATINGS SUBJECT TO SHORT-CIRCUIT, LOAD FLOW, AND COORDINATION STUDIES.

3. PROTECTION, CONTROL, AND METERING NOT SHOWN; TO BE DEFINED IN DETAILED DESIGN PER UTILITY REQUIREMENTS.

4. GROUNDING SYSTEM TO BE DESIGNED PER IEEE AND UTILITY STANDARDS.

5. AUXILIARY POWER SYSTEM CONFIGURATION AND SIZING SUBJECT TO MANUFACTURER DATA AND FINAL LOAD CALCULATIONS.

6. BUS CONFIGURATIONS AND INTERCONNECTION ARRANGEMENT SUBJECT TO UTILITY APPROVAL.

PRELIMINARY

REFERENCE DRAWINGS	
DRAWING NO.:	DESCRIPTION
-	-
-	-
-	-
-	-

REVISION HISTORY		
REV.	DATE	DESCRIPTION
A	-	W O R K I N G
-	-	-
-	-	-
-	-	-

PROJECT NO.:	**00008_2026_01**
DRAWING NO.:	**E-100**
SCALE:	**NTS**
DATE:	**02/09/2026**

TITLE

ANSON 300MW BESS PROJECT
CONCEPTUAL SINGLE LINE DIAGRAM